


HAND WHEEL ROTATION: OPEN LEFT

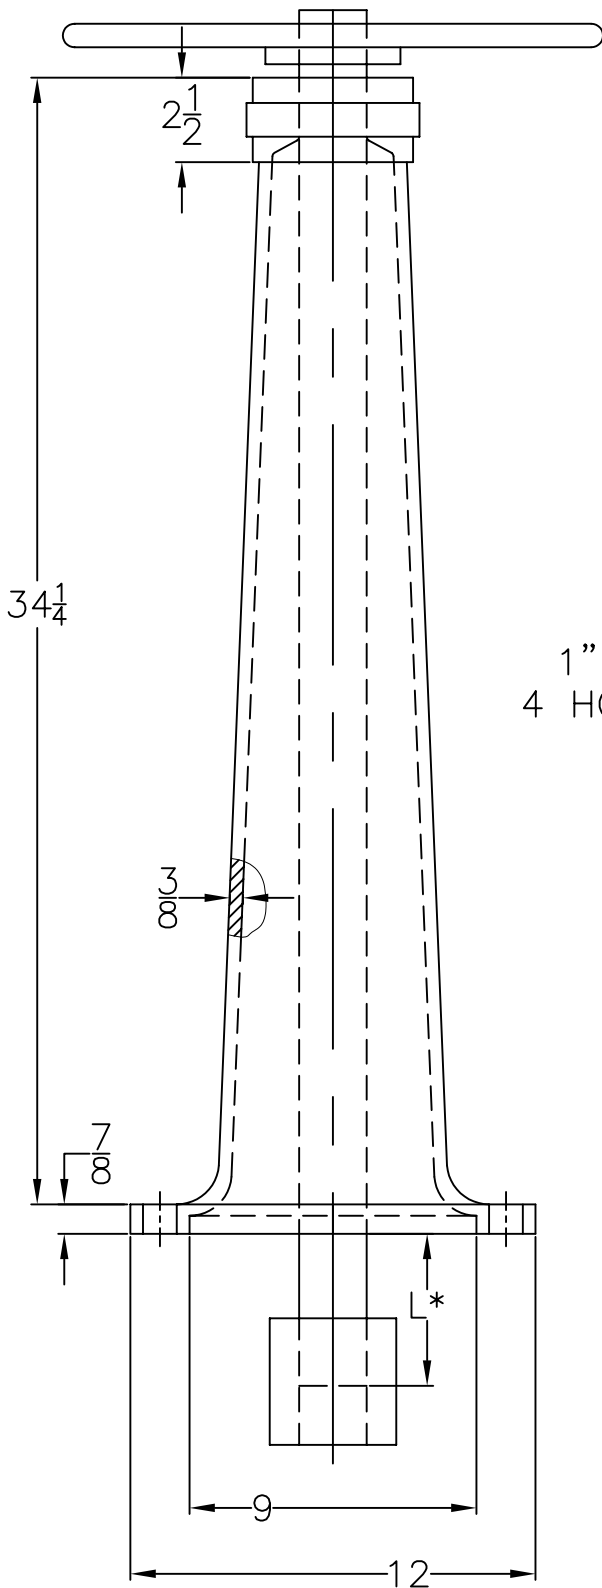

NOTES:

N* = 17"

SHOP COAT IS RUST INHIBITIVE PRIMER

1" HOLE THRU
4 HOLES AT 90°

10 1/4 DIA B.C.

CORED HOLE:
BORED AND BUSHED
TO STEM DIA

The F-5500-T Floor stand is for use on non-rising stem valves. Floor stands are of high strength cast iron and may be provided with extension arms of steel, stainless steel or bronze as specified.

M&H VALVE COMPANY
ANNISTON, ALABAMA
A DIVISION OF MCWANE INC.

DWN: TRIJ

DATE: 7/1/05

DWG. NO.
ACFS-5500

FLOOR STAND
STYLE F-5500-T
NON-RISING / NON-INDICATING